



# TECHNICAL BULLETIN

## Self Ballasted Mercury Vapor Reflector Lamp



### Self Ballasted Mercury Vapor 250WSB/R40FL-E26

ANSI Code: B94

Product Code: 68388



- Features:**
- Ballast Not Required
  - Screws Into Existing Incandescent Socket
  - Built-in Reflector
  - Improved Light Color
  - Nickel Plated Base
  - Long Life

PERFORMANCE DATA		
Initial lumens at rated watts after 100 hours operation	3200	lm
Mean lumens at 10 hrs/start	2400	lm
Average life	12000	h
Warm up time (90% lumens)	4	min
Correlated color temperature	4500	K
Color rendering index	40	
Operating position	ANY	
Time to hot re-start, maximum	15	min

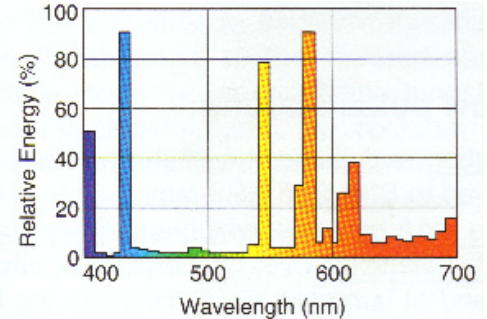

ELECTRICAL CHARACTERISTICS		
Nominal lamp wattage	250	W
Nominal lamp voltage	120	V
Nominal lamp current	2.60	Arms
Max. starting current	2.15	Arms
Allowable Line Voltage Var.	±5	%
Extinguishing Voltage	108	Vrms
BEAM CHARACTERISTICS		
Beam Lumens (0-65°)	2700	lm
Axial Beam Intensity (0°)	800	cd
Beam Angle	130	deg

PHYSICAL DESCRIPTION		
Maximum overall length	198 (7.8)	mm (in)
Bulb diameter	126 (4.96)	mm (in)
Effective arc length	21	mm
Base to bulb eccentricity (max)	3	deg
Maximum base temperature	190 (372)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb material	Borosilicate (Hard Glass)	
Bulb designation	R40	
Bulb finish	Frosted, reflector	
Base designation	E26 Medium	
Luminaire requirements	Cover for direct exposure	

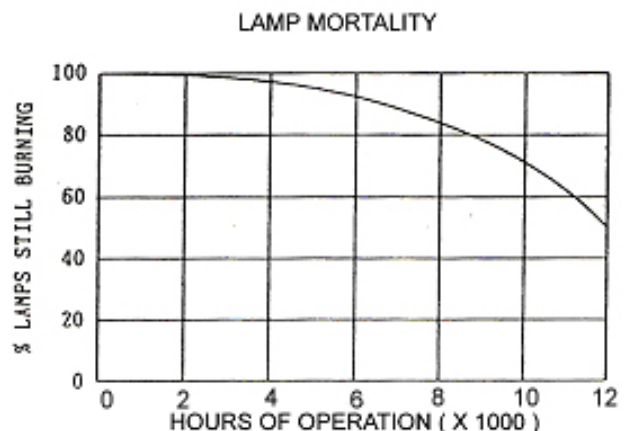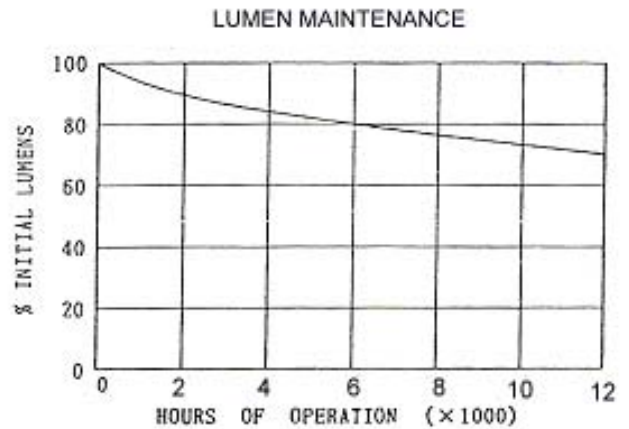

ISO 9001:2008 Certified    ISO 14001:2004 Certified

OSHAS 18001:2007 Certified    ISO 17025:2005 Accredited



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

EQS-N-52-78-68388

Address: 9150 Hendricks Rd., Mentor, OH 44060

Phone: 888-665-2677    Fax: 800-811-7395    E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)

Phone: (440) 350-7000    Fax: (440) 350-7001    Web: [www.eyelighting.com](http://www.eyelighting.com)



**⚠WARNING**

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

**RISK OF ELECTRIC SHOCK**

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

**RISK OF FIRE**

- Keep combustible materials away from lamp during operation

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE**

- Do not exceed rated voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

**⚠CAUTION**

**RISK OF BURN**

- Allow lamp to cool before handling.

**LAMP MAY SHATTER AND CAUSE INJURY**

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

**LAMP OPERATING INSTRUCTIONS**

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption. If power supply dips or is interrupted, lamps may extinguish and not restart. Turn off power supply for 10-15 minutes and allow lamp to fully cool. Lamp will restart when power is restored.

<b>R</b>	Conforms to: USA: 21CFR1040.30 Canada: ANSI 136.1-2000
----------	---

- LAMP CONTAINS MERCURY. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677.

