



TECHNICAL BULLETIN METAL HALIDE

EYE Pulse Start M350X/U/PS

ANSI CODE M131/E


Product Code: 50565

- FEATURES:**
- High Output, Universal Metal Halide
 - High initial and maintained lumens
 - Superior lamp to lamp color consistency


- Pulse Start Performance

PERFORMANCE DATA

Initial lumens	33000(V) 30000(H)	lm
Mean lumens at 11 hours/start	25600(V) 22500(H)	lm
Rated average life	20000(V) 15000(H)	hr
Correlated color temperature	4300	°K
Color rendering index [Ra]	60	
Operating position	Universal	
Time to hot re-start (max)	10	min

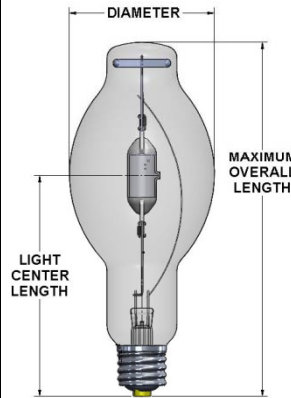

SPECTRAL DISTRIBUTION

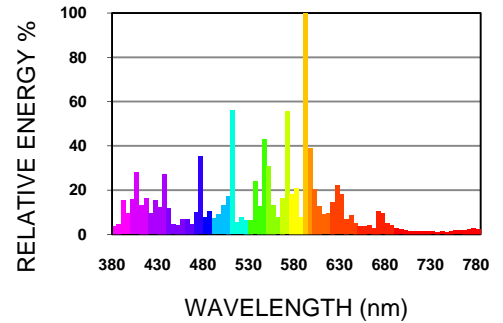

ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	350	W
Nominal lamp voltage	135	V _{rms}
Nominal lamp current	2.8	A _{rms}
Current crest factor	1.8	max


Ballast requirements M131

Open Circuit Voltage -30°C(-22°F)	254	V _{rms}
	483	V _{peak}
starting current	3.2-5(Min-Max)	A _{rms}

Ignitor requirement

Pulse requirement(ignitor)	3 - 4max	kV
Minimum pulse width	1.3 @ 2.73	us@kV
Minimum pulse repetition rate	1	/ half cycle
Pulse position(s)	64-110,244-290	°(cycle)


LUMEN MAINTENANCE

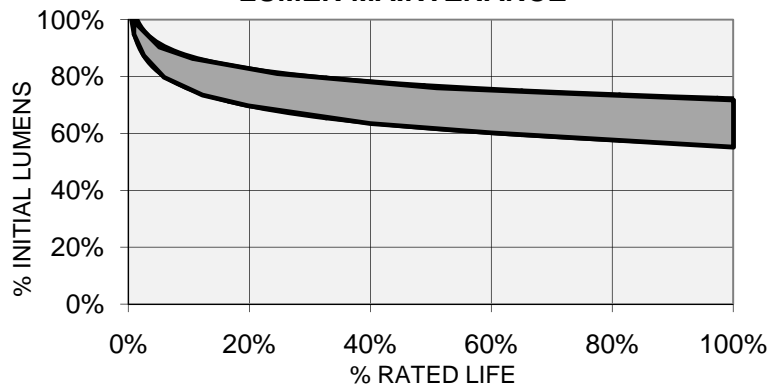

PHYSICAL DESCRIPTION

Effective arc length	43(1.7)	mm (in)
Maximum overall length	292(11.5)	mm (in)
Light center length	178(7.0)	mm (in)
Bulb diameter	118 (4.62)	mm (in)
Base to bulb eccentricity	3°	max
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	BT37	
Bulb material	Borosilicate(hard glass)	
Arc tube material	Quartz	
Bulb finish	Clear	
Base designation	E39	

LAMP MORTALITY

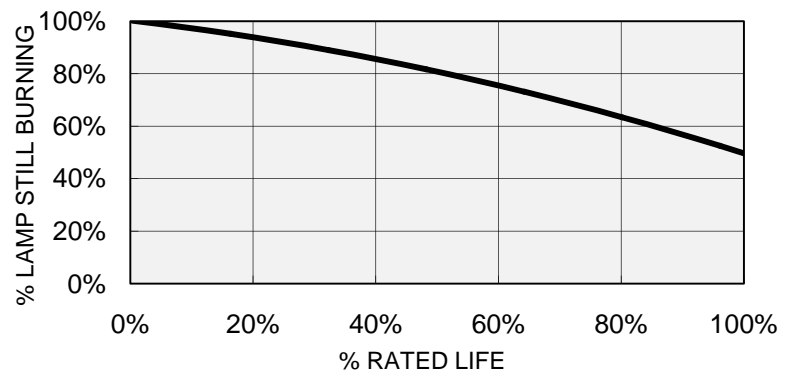

ISO 9001:2008 Certified ISO 14001:2004 Certified OSHAS 18001:2007 Certified ISO 17025:2005 Accredited



**EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.**
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060
Phone: 888-66-LAMPS Fax: 800-811-7395 E-Mail: sales@eyelighting.com
Phone: (440) 350-7000 Fax: (440) 350-7001 www.eyelighting.com

9/23/2010



⚠ WARNING

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

RISK OF ELECTRIC SHOCK

•Turn power off before inspection, installation or removal •Protect lamp from direct contact with liquids to avoid breakage from thermal shock

RISK OF FIRE

•Keep combustible materials away from lamp during operation

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE

•Do not exceed rated ballast voltage •Do not use lamp if outer glass is scratched or broken. •Do not use beyond rated life •Do not turn on lamp until fully installed •Use only with a fixture and ballast rated for this product •Turn lamp off at least once a week for 15 minutes •Electrically insulate any metal to glass support in fixture

⚠ CAUTION

RISK OF BURN

•Allow lamp to cool before handling.

LAMP MAY SHATTER AND CAUSE INJURY

•Do not use excessive force when installing lamp •Dispose of lamp in a closed container

LAMP OPERATING INSTRUCTIONS

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption. If power supply dips or is interrupted, lamps may extinguish and not restart.

Turn off power supply for 10-15 minutes and allow lamp to fully cool. Lamp will restart when power is restored.

R **Conforms to:**
USA: 21CFR1040.30 Canada: ANSI 136.1-2000

Hg **Lamp contains Mercury.**
Manage in Accord with Disposal Laws

ISO 9001:2008 Certified ISO 14001:2004 Certified OSHAS 18001:2007 Certified ISO 17025:2005 Accredited

