



TECHNICAL BULLETIN METAL HALIDE

EYE Multi Metal™ M175X/U/MED


ANSI Code: M57/E

Product Code: 54866


- Features:**
- High initial and maintained lumens
 - Superior lamp to lamp color consistency
 - Universal burning position

PERFORMANCE DATA

Initial lumens at rated watts	14400 (V)	lm
after 100 hours operation	12800 (H)	
Mean lumens at 10 hours/start	9300	lm
Rated average life	10000 (V) 7500 (H)	h
Warm up time, maximum	4	min
Correlated color temperature	4000	K
CIE chromaticity	0.383, 0.387	X, Y
Color rendering index (Ra)	65	
Operating Position	Universal	
Time to hot re-start, maximum	15	min



SPECTRAL DISTRIBUTION

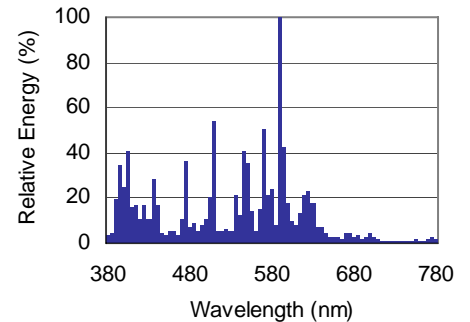

ELECTRICAL CHARACTERISTICS



Nominal lamp wattage	175	W
Nominal lamp voltage	132	V
Nominal lamp current	1.5	A _{rms}
Maximum current crest factor	1.8	-
Maximum starting current	2.5	A _{rms}
Minimum starting current	1.5	A _{rms}
Ballast requirements	Use with ballast rated for ANSI M57 lamp	
Open circuit voltage (CWA) -30°C (-22°F)	382	V _{rms}
	540	V _{peak}
Pulse requirements	None	
Lampholder voltage rating	600	V

PHYSICAL DESCRIPTION

Maximum overall length	138 (5.43)	mm (in)
Light center length	86 (3.39)	mm (in)
Bulb diameter	54 (2.13)	mm (in)
Max. base - bulb eccentricity	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	ED17	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	Quartz	
Effective arc length	26 (1.02)	mm (in)
Bulb finish	Clear	
Base designation	E26 Medium	

FIXTURE REQUIREMENT

E Rated - Enclosed fixture required

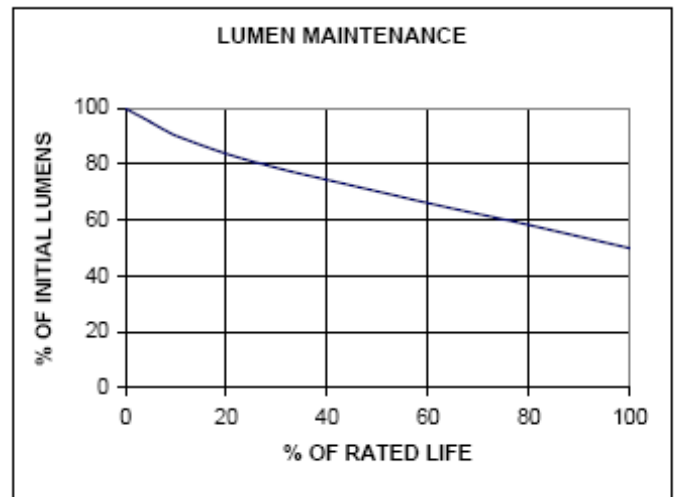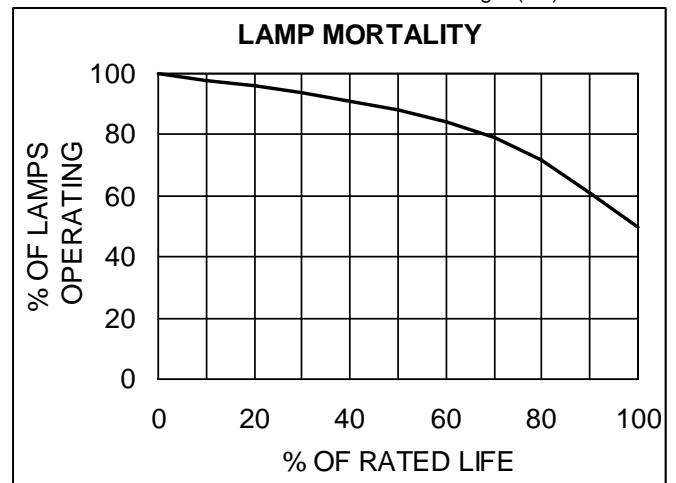

ISO 9001:2008 Certified ISO 14001:2004 Certified
EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.
 A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

OSHAS 18001:2007 Certified ISO 17025:2005 Accredited

Address: 9150 Hendricks Rd., Mentor, OH 44060
 Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: sales@eyelighting.com
 Phone: (440) 350-7000 Fax: (440) 350-7001 Web: www.eyelighting.com



⚠WARNING

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

RISK OF ELECTRIC SHOCK

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

RISK OF FIRE

- Keep combustible materials away from lamp during operation

UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

⚠CAUTION

RISK OF BURN

- Allow lamp to cool before handling.

LAMP MAY SHATTER AND CAUSE INJURY

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

LAMP OPERATING INSTRUCTIONS

This is a discharge lamp and requires some time to restart and come up to full brightness after a power interruption.

R	Conforms to: USA: 21CFR1040.30
----------	-----------------------------------

Hg-LAMP CONTAINS MERCURY

Manage in Accord with Disposal Laws

See: www.lamprecycle.org or 1-888-665-2677

ISO 9001:2008 Certified

ISO 14001:2004 Certified

OSHAS 18001:2007 Certified

ISO 17025:2005 Accredited



EYE LIGHTING INTERNATIONAL
OF NORTH AMERICA, INC.

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060

Phone: 888-665-2677 Fax: 800-811-7395 E-Mail: sales@eyelighting.com

Phone: (440) 350-7000 Fax: (440) 350-7001 Web: www.eyelighting.com