



# TECHNICAL BULLETIN HIGH PRESSURE SODIUM

## Sunlux® EN LU70/EN

ANSI Code: S62

Product Code: 66055



<b>Features:</b>	<ul style="list-style-type: none"> <li>• Long life</li> <li>• Low cost efficient lighting</li> <li>• Nickel plated base w/ceramic insulator</li> </ul>	<ul style="list-style-type: none"> <li>• Universal burning position</li> <li>• EPA TCLP compliant for non-hazardous waste</li> <li>• Green (EN) date code on base insulator</li> </ul>
------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	6300	lm
Mean lumens at 10 hours/start	5500	lm
Rated average life	24000+	h
Warm up time (90% lumens)	5	min
Correlated color temperature	1900	K
CIE chromaticity	0.525 0.415	X, Y
Color rendering index	22	
Operating Position	Any	
Hot Re-strike time	<3	min


EPA TCLP Compliant	Yes
--------------------	-----

### SPECTRAL DISTRIBUTION

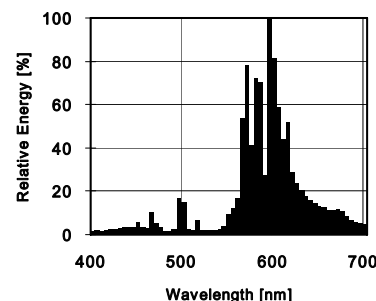


### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	70	W
Nominal lamp voltage	52	V
Nominal lamp current	1.6	A <sub>rms</sub>
Current crest factor (max.)	1.80	
Max. starting current	2.4	A <sub>rms</sub>
Min. starting current	1.6	A <sub>rms</sub>
Ballast requirements	Use with ballast rated for S62 lamps	

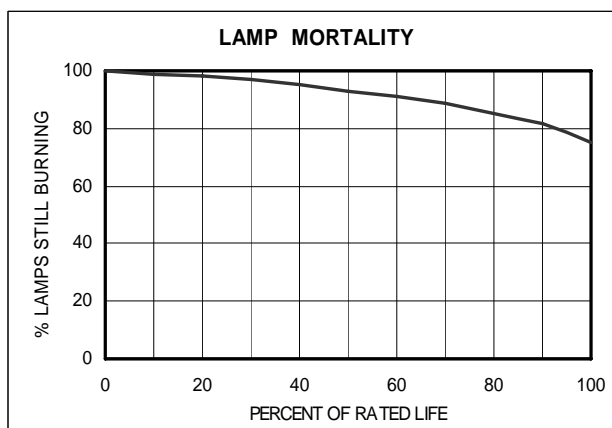

### PHYSICAL DESCRIPTION

Maximum overall length	197 (7.75)	mm (in)
Light center length	127 (5.00)	mm (in)
Bulb diameter	74.6 (2.94)	mm (in)
Base to bulb eccentricity (max.)	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	ED23.5	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	PCA	
Arc length	27 (1.06)	mm (in)
Bulb finish	Clear	
Base designation	Mogul (E39)	

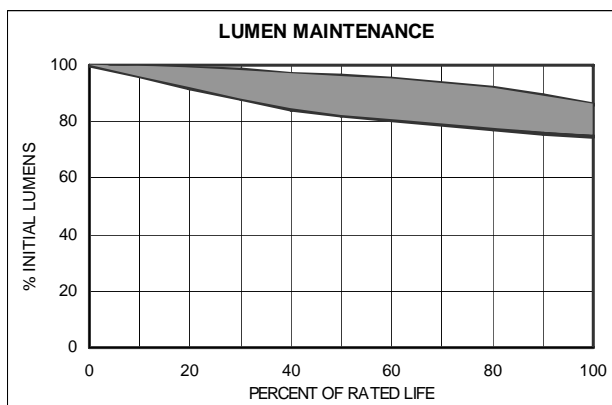

OSHAS 18001:2007 Certified ISO 17025:2005 Accredited ISO 9001:2008 Certified ISO 14001:2004 Certified



Address: 9150 Hendricks Rd., Mentor, OH 44060  
 Phone: 888-88-LAMPS Fax: 800-811-7395 E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)  
 Phone: (440) 350-7000 Fax: (440) 350-7001 [www.eyelighting.com](http://www.eyelighting.com)



**⚠WARNING**

**RISK OF ELECTRIC SHOCK:**

- Turn power off before inspection, installation or removal.
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock.

**RISK OF FIRE:**

- Keep combustible materials away from lamp during operation.

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage.
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life.
- Do not turn on lamp until fully installed.
- Use only with fixture and ballast rated for this product.
- Electrically insulate any metal to glass support in fixture.

**⚠CAUTION**

**RISK OF BURN:**

- Allow lamp to cool before handling.
- Contains sodium – Avoid skin contact with broken pieces.

**LAMP MAY SHATTER AND CAUSE INJURY IF BROKEN**

- Do not use excessive force when installing lamp.
- Dispose of lamp in an enclosed container.
- Wear safety glasses and gloves when installing lamp.

Note: All information subject to change without notice.

**Hg-LAMP CONTAINS MERCURY**  
Manage in Accord with Disposal Laws  
See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

OSHAS 18001:2007 Certified ISO 17025:2005 Accredited ISO 9001:2008 Certified ISO 14001:2004 Certified



Address: 9150 Hendricks Rd., Mentor, OH 44060  
Phone: 888-66-LAMPS Fax: 800-811-7395 E-Mail: [sales@eyelighting.com](mailto:sales@eyelighting.com)  
Phone: (440) 350-7000 Fax: (440) 350-7001 [www.eyelighting.com](http://www.eyelighting.com)