



# TECHNICAL BULLETIN METAL HALIDE

## EYE Clean Arc™ MT400D/HOR

ANSI Code: Use with ballast rated for ANSI M59 lamp

Product Code: 57881


**Features:**

High Color Rendering; CRI 90  
High Color Temperature; 6500K  
Operates on Standard Metal Halide CWA ballast

Horizontal Operating Position  
Spectral Distribution Similar to Natural Sunlight  
Tubular Compact Design

### PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	29000	lm
Mean lumens at 10 hours/start	22000	lm
Rated average life at 10hrs/start	12000	h
Warm up time, maximum	8	min
Correlated color temperature	6500	K
CIE chromaticity	0.310, 0.349	X, Y
Color rendering index (Ra)	90	
Operating Position	HOR±15°	
Time to hot re-start, maximum	15 max.	min

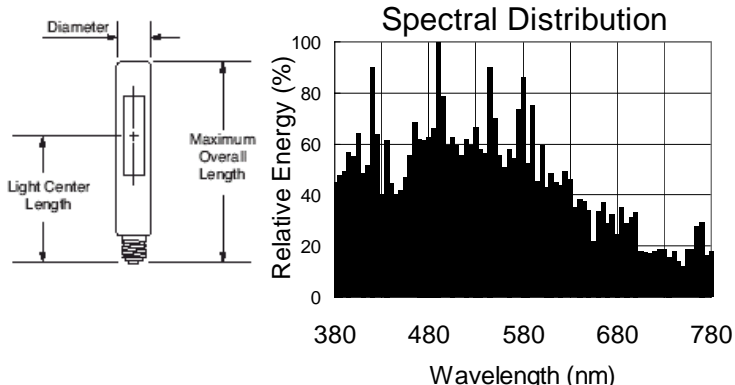

### ELECTRICAL CHARACTERISTICS



Nominal lamp wattage	400	W
Nominal lamp voltage	135	V
Nominal lamp current	3.3	A <sub>rms</sub>
Maximum current crest factor	1.8	-
Maximum starting current	5.0	A <sub>rms</sub>
Minimum starting current	3.3	A <sub>rms</sub>
Ballast requirements	Use with ballast rated for ANSI M59 lamp	
Open circuit voltage (CWA) -30°C (-22°F)	280	V <sub>rms</sub>
	504	V <sub>peak</sub>
Pulse requirements	None	

### PHYSICAL DESCRIPTION

Maximum overall length	250 (9.843)	mm (in)
Light center length	147 (5.787)	mm (in)
Bulb diameter	55 (2.165)	mm (in)
Max. base - bulb eccentricity	3 max.	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	T17	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	Quartz	
Effective arc length	38 (1.496)	mm (in)
Bulb finish	Clear	
Base designation	E39 Mogul	

### FIXTURE REQUIREMENT

E Rated - Enclosed fixture required

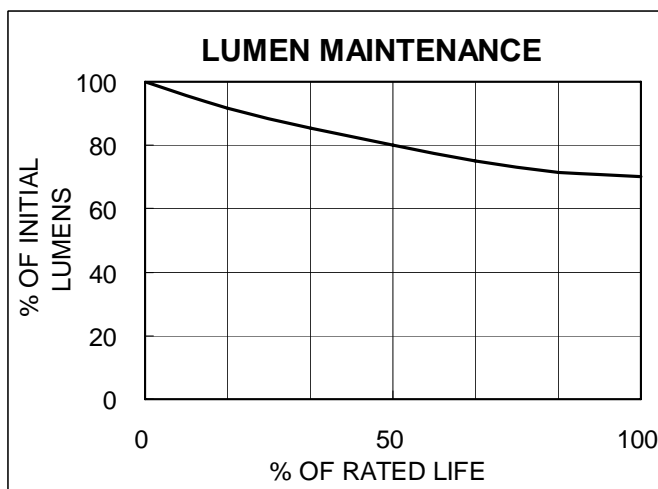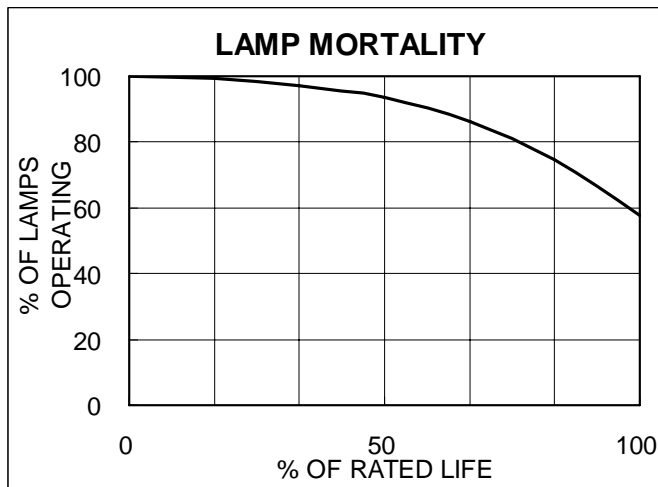

ISO 9001:2008 Certified

ISO 14001:2004 Certified

OSHAS 18001:2007 Certified

ISO 17025:2005 Accredited



**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**

A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060

Phone: 888665-2677 Fax: 800-811-7395 E-mail: sales@eyelighting.com

Phone: (440) 350-7000 Fax: (440) 350-7001 [www.eyelighting.com](http://www.eyelighting.com)



**⚠ WARNING**

This lamp can cause serious skin burn and eye inflammation from short-wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available.

**RISK OF ELECTRIC SHOCK**

- Turn power off before inspection, installation or removal
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock

**RISK OF FIRE**

- Keep combustible materials away from lamp during operation

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE, OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life
- Do not turn on lamp until fully installed
- Use only with a fixture and ballast rated for this product
- Turn lamp off at least once a week for 15 minutes
- Electrically insulate any metal to glass support in fixture

**⚠ CAUTION**

**RISK OF BURN**

- Allow lamp to cool before handling.

**LAMP MAY SHATTER AND CAUSE INJURY**

- Do not use excessive force when installing lamp
- Dispose of lamp in a closed container

**LAMP OPERATING INSTRUCTIONS**

Nominal lamp characteristics may vary for different ballast models.

**R**

Conforms to:  
USA: 21CFR1040.30 Canada: ANSI 136.1-2000

**Hg-LAMP CONTAINS MERCURY**

Manage in Accord with Disposal Laws

See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

